

Description


PECJ N-channel Enhancement Mode Power MOSFET

Features


- 20V, 4A
- $R_{DS(ON)} < 27m\Omega$ @ $V_{GS} = 4.5V$
- $R_{DS(ON)} < 44m\Omega$ @ $V_{GS} = 2.5V$
- Advanced Trench Technology
- Excellent $R_{DS(ON)}$ and Low Gate Charge
- Lead free product is acquired

Application


- Load Switch
- PWM Application
- Power management



SOT-23 top view



Marking and pin Assignment



Schematic Diagram

Package Marking and Ordering Information

Device Marking	Device	OUTLINE	Device Package	Reel Size	Reel (PCS)	Per Carton (PCS)
2302C	PECJ2302C	TAPING	SOT-23	7inch	3000	180000

Absolute Maximum Ratings ($T_A=25^\circ C$ unless otherwise specified)

Symbol	Parameter	Max.	Units
V_{DSS}	Drain-Source Voltage	20	V
V_{GSS}	Gate-Source Voltage	± 12	V
I_D	Continuous Drain Current	$T_A = 25^\circ C$	A
		$T_A = 100^\circ C$	A
I_{DM}	Pulsed Drain Current ^{note1}	16	A
P_D	Power Dissipation	$T_A = 25^\circ C$	W
$R_{\theta JA}$	Thermal Resistance, Junction to Case	156	$^\circ C/W$
T_J, T_{STG}	Operating and Storage Temperature Range	-55 to +150	$^\circ C$

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
Off Characteristics						
$V_{(\text{BR})\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{GS}=0\text{V}$, $I_D=250\mu\text{A}$	20	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=20\text{V}$, $V_{GS}=0\text{V}$,	-	-	1.0	μA
I_{GSS}	Gate to Body Leakage Current	$V_{DS}=0\text{V}$, $V_{GS}=\pm 12\text{V}$	-	-	± 100	nA
On Characteristics						
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{DS}=V_{GS}$, $I_D=250\mu\text{A}$	0.5	0.7	1.2	V
$R_{DS(\text{on})}$ note2	Static Drain-Source on-Resistance	$V_{GS}=4.5\text{V}$, $I_D=4\text{A}$	-	21	27	$\text{m}\Omega$
		$V_{GS}=2.5\text{V}$, $I_D=3\text{A}$	-	29	44	
Dynamic Characteristics						
C_{iss}	Input Capacitance	$V_{DS}=10\text{V}$, $V_{GS}=0\text{V}$, $f=1.0\text{MHz}$	-	358	-	pF
C_{oss}	Output Capacitance		-	69.3	-	pF
C_{rss}	Reverse Transfer Capacitance		-	58.5	-	pF
Q_g	Total Gate Charge	$V_{DS}=10\text{V}$, $I_D=2\text{A}$, $V_{GS}=4.5\text{V}$	-	5.6	-	nC
Q_{gs}	Gate-Source Charge		-	0.8	-	nC
Q_{gd}	Gate-Drain("Miller") Charge		-	1	-	nC
Switching Characteristics						
$t_{d(on)}$	Turn-on Delay Time	$V_{DS}=10\text{V}$, $I_D=4\text{A}$, $R_{\text{GEN}}=3\Omega$, $V_{GS}=4.5\text{V}$	-	16	-	ns
t_r	Turn-on Rise Time		-	51	-	ns
$t_{d(off)}$	Turn-off Delay Time		-	21	-	ns
t_f	Turn-off Fall Time		-	19	-	ns
Drain-Source Diode Characteristics and Maximum Ratings						
I_s	Maximum Continuous Drain to Source Diode Forward Current		-	-	4	A
I_{SM}	Maximum Pulsed Drain to Source Diode Forward Current		-	-	16	A
V_{SD}	Drain to Source Diode Forward Voltage	$V_{GS}=0\text{V}$, $I_s=4\text{A}$	-	-	1.2	V

Notes: 1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature

2. Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 0.5\%$

Typical Performance Characteristics

Figure 1: Output Characteristics

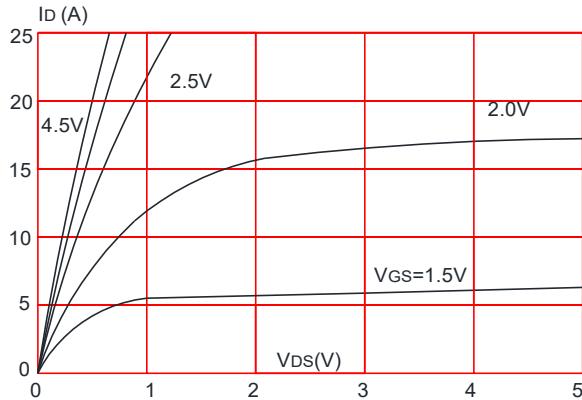


Figure 2: Typical Transfer Characteristics

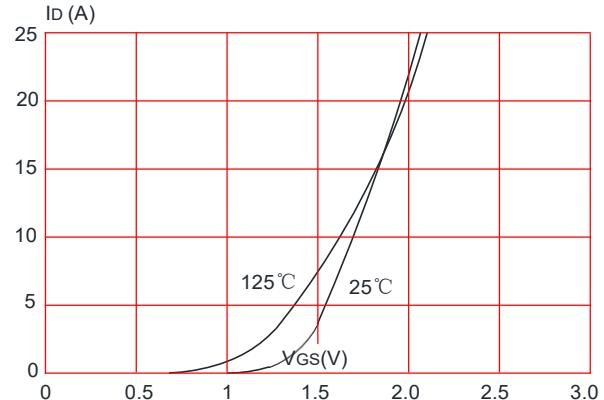


Figure 3: On-resistance vs. Drain Current

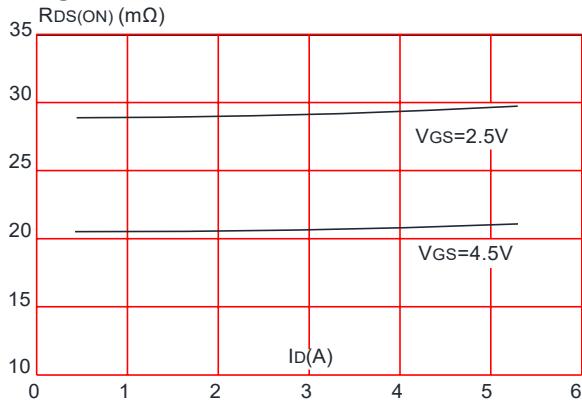


Figure 5: Gate Charge Characteristics

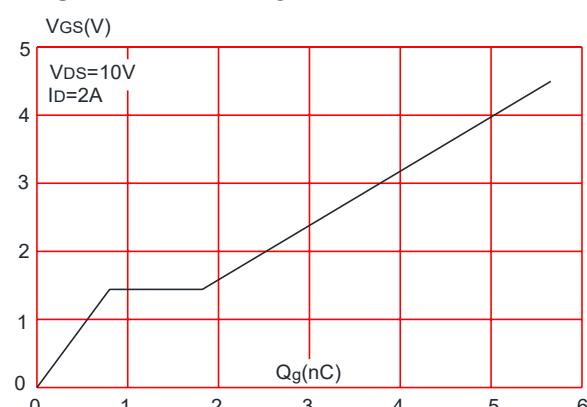


Figure 4: Body Diode Characteristics

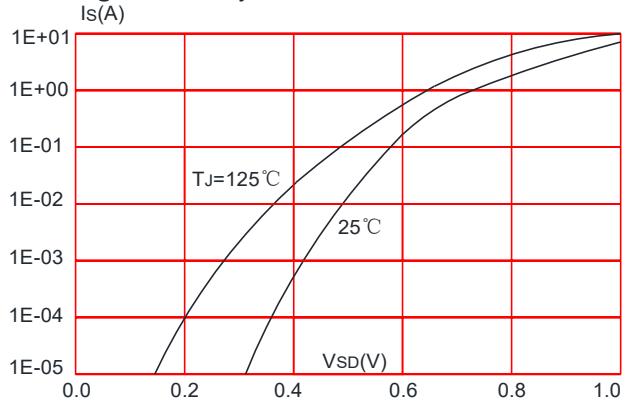


Figure 6: Capacitance Characteristics

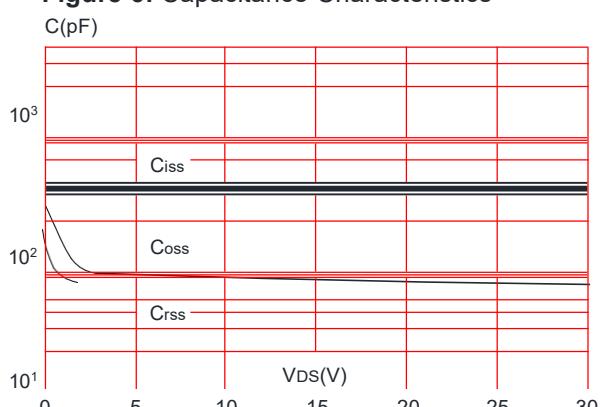


Figure 7: Normalized Breakdown Voltage vs. Junction Temperature

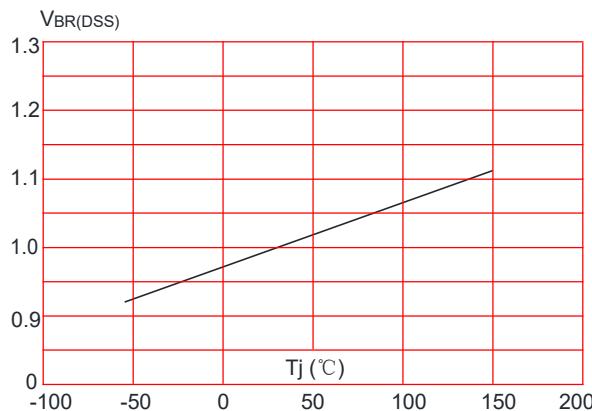


Figure 9: Maximum Safe Operating Area

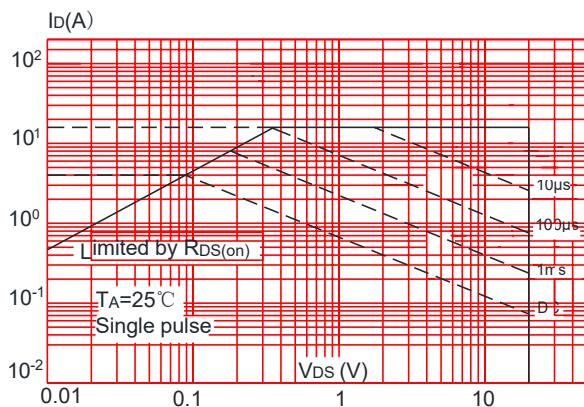


Figure 11: Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

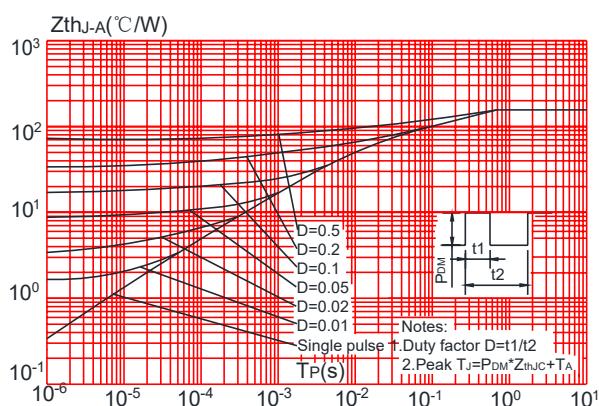


Figure 8: Normalized on Resistance vs. Junction Temperature


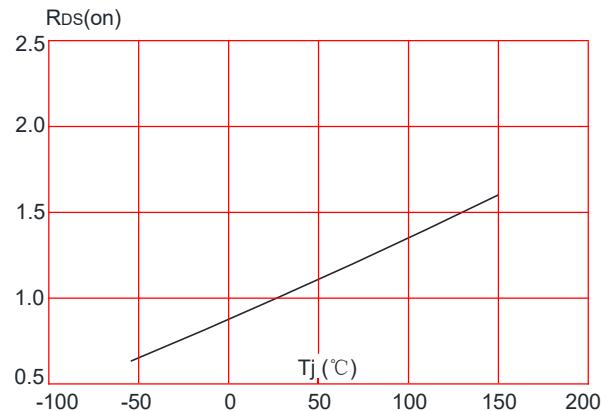


Figure 10: Maximum Continuous Drain Current vs. Ambient Temperature

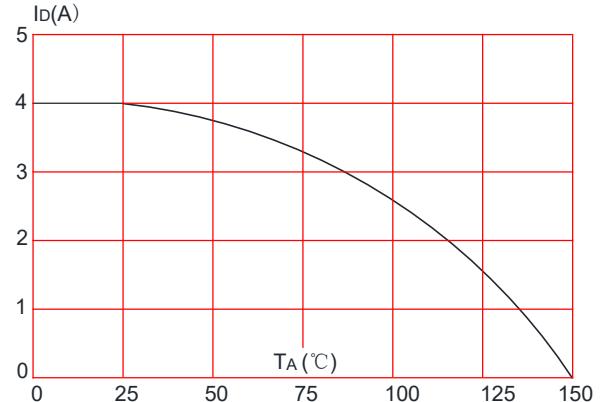

Test Circuit

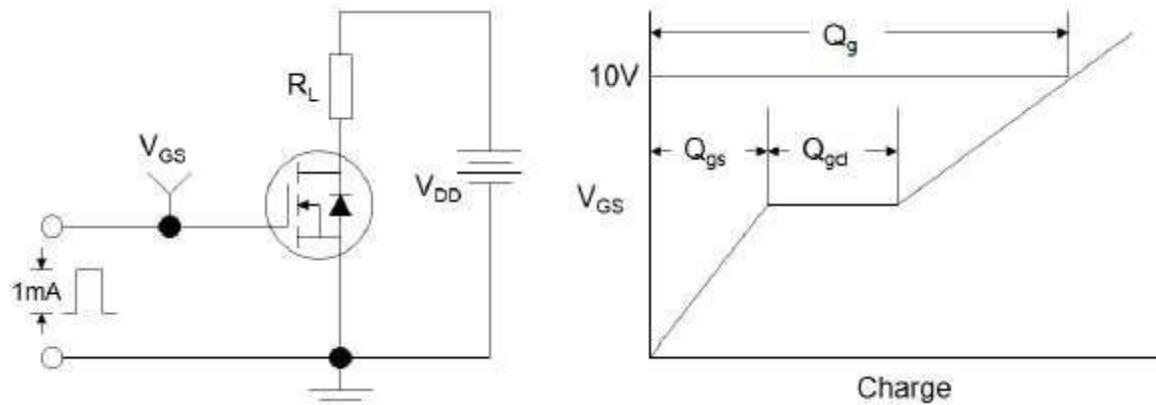


Figure 1: Gate Charge Test Circuit & Waveform

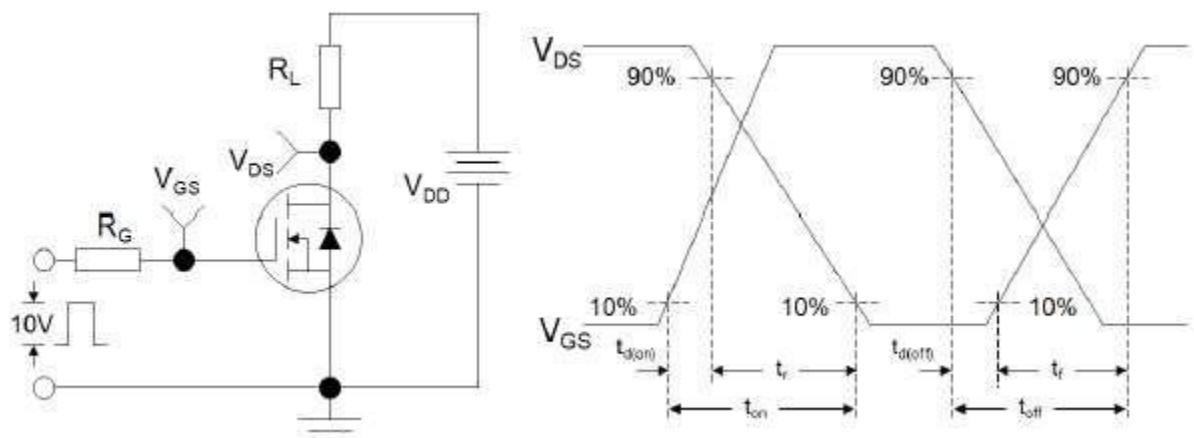


Figure 2: Resistive Switching Test Circuit & Waveforms


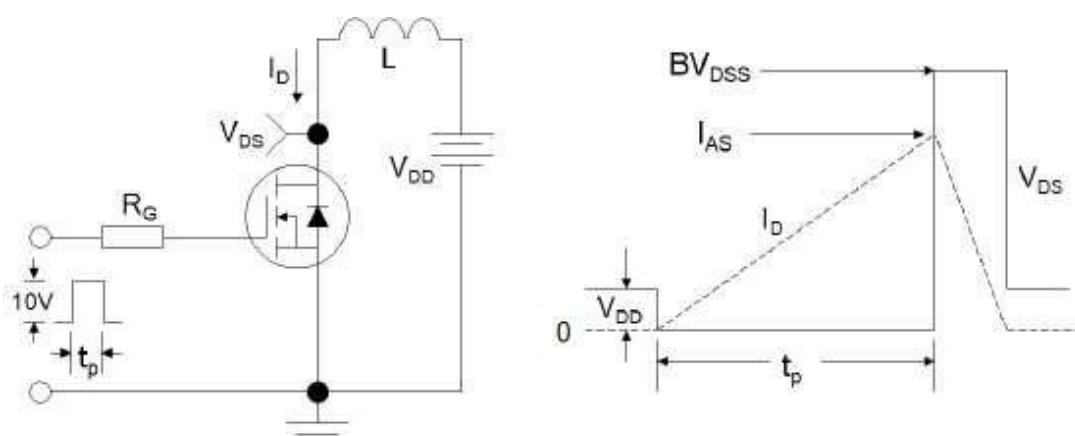



Figure 3: Unclamped Inductive Switching Test Circuit & Waveforms

Package Mechanical Data-SOT-23

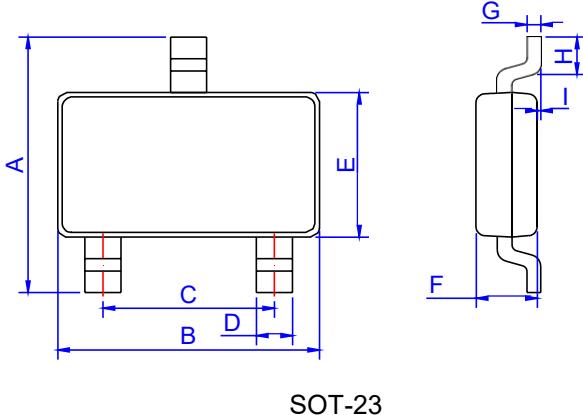

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.30	2.40	2.50	0.091	0.095	0.098
B	2.80	2.90	3.00	0.110	0.114	0.118
C	1.90 REF			0.075 REF		
D	0.35	0.40	0.45	0.014	0.016	0.018
E	1.20	1.30	1.40	0.047	0.051	0.055
F	0.90	1.00	1.10	0.035	0.039	0.043
G		0.10	0.15		0.004	0.006
H	0.20			0.008		
I	0		0.10	0		0.004

Package Information-SOT-23

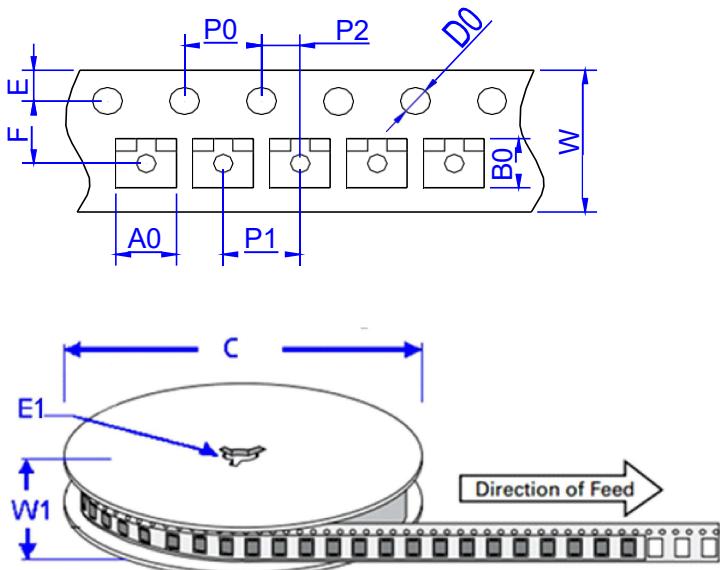

Ref.	Dimensions	
	Millimeters	Inches
A0	3.15 ± 0.3	0.124 ± 0.012
B0	2.77 ± 0.3	0.109 ± 0.012
C	178	7.0
D0	1.50 ± 0.1	0.059 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3 ± 0.3	0.524 ± 0.012
F	3.5 ± 0.2	0.138 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	4.00 ± 0.2	0.157 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	8.00 ± 0.2	0.315 ± 0.008
W1	11.5 ± 1.0	0.453 ± 0.039