

GENERAL PURPOSE PLASTIC SILICON RECTIFIER


REVERSE VOLTAGE: 50 to 1000 VOLTS
FORWARD CURRENT: 1.5 AMPERES

FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High forward surge current capability

MECHANICAL DATA

Case: Molded plastic, DO-15
 Epoxy: UL 94V-O rate flame retardant
 Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
 Polarity: Color band denotes cathode end
 Mounting position: Any
 Weight: 0.015ounce, 0.4gram

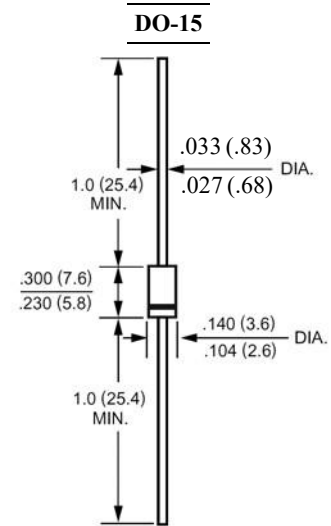

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	1N5391	1N5392	1N5393	1N5394	1N5395	1N5396	1N5397	1N5398	1N5399	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	300	400	500	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	210	280	350	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	300	400	500	600	800	1000	Volts
Maximum Average Forward Rectified Current .375" (9.5mm) Lead Length at $T_A=75^\circ\text{C}$	$I_{(AV)}$	1.5									Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	50									Amp
Maximum Forward Voltage at 1.5A DC and 25°C	V_F	1.1									Volts
Maximum Reverse Current at $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage $T_A=100^\circ\text{C}$	I_R	500									uAmp
Typical Junction Capacitance (Note 1)	C_J	20									pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	50									°C/W
Operating Junction Temperature Range	T_J	-55 to +150									°C
Storage Temperature Range	T_{stg}	-55 to +150									°C

NOTES:

1 Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2 Thermal Resistance From Junction to Ambient 0.375" (9.5mm) lead length P.C.B. Mounted.

RATINGS AND CHARACTERISTIC CURVES

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

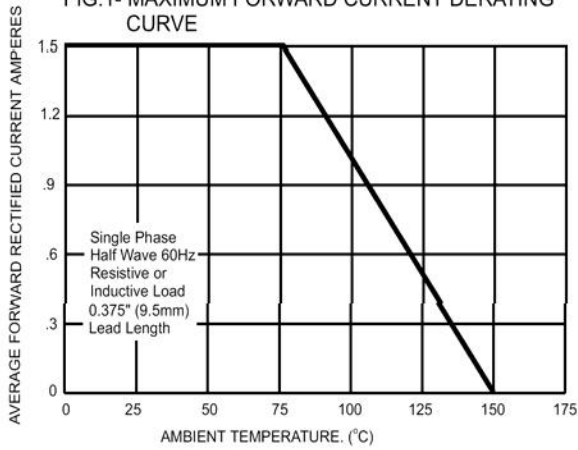


FIG.2- TYPICAL FORWARD CHARACTERISTICS

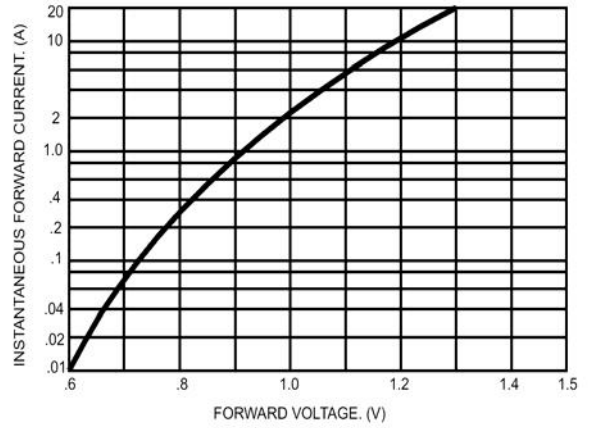


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

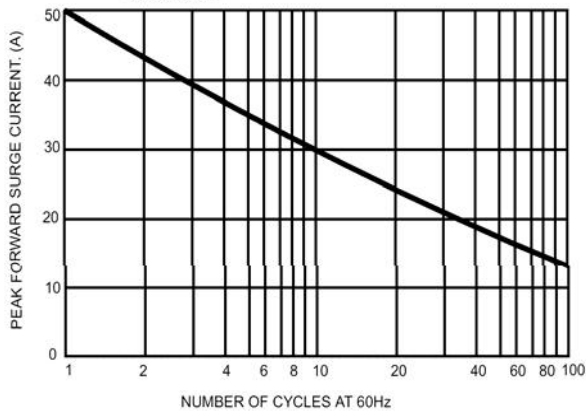


FIG.4- TYPICAL REVERSE CHARACTERISTICS

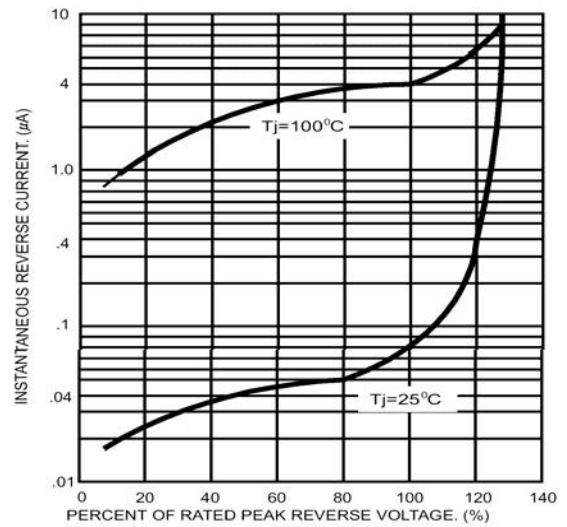


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

